

CONDENSERS

REMOTE MOUNT & R-12 TYPE

NEW! Redesigned Remote Mount Condenser


Allows you to install A/C in your car when there is no room to mount a condenser in front of your radiator. Installation will require a trinary function safety switch (page 54) and an extra long hose kit. Must be mounted in a location allowing adequate air flow to enter and exit condenser.

New remote condensers come complete with SPAL fan, shroud, fitting clamp locks, bolts, captured O-rings, #6 and #8 90° barb fittings and universal mounting brackets. 14" wide x 20" long x 4" thick.

Not recommended as a primary condenser - Ask your dealer about specific applications and recommendations.


03143-VUC Remote condenser 14" x 20" with 14" SPAL fan

03500-OVA Remote condenser 12" x 20" with 12" skewed blade fan. (not shown)

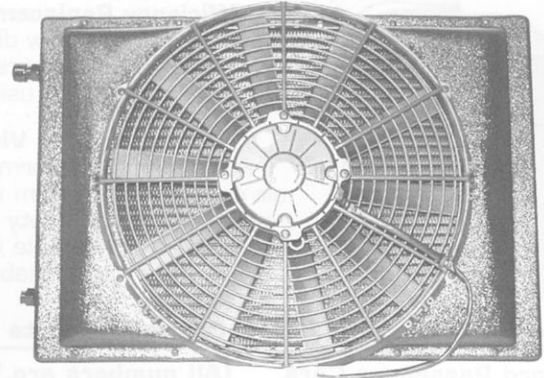

Tube and Fin Condensers

For maximum performance from your air conditioning system we recommend covering as much of your radiator core as possible. All tube and fin condensers mount with tubes running horizontal. Straight, side and bottom line connections available. All Vintage Air condensers include universal mounting brackets.

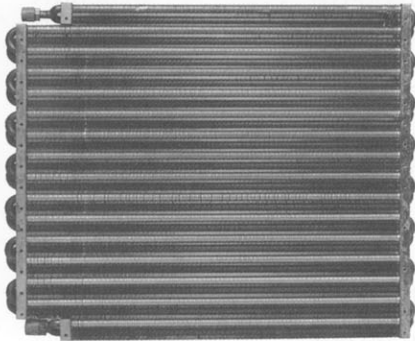

Horizontal Tube and Fin Condensers

Used with HFC-134a or R-12 refrigerants

03040-VUC 19.25"W x 16"H x 1.25" thick (side exit)

03045-VUC 19.25"W x 16"H x 1.25" thick (straight exit)

03050-VUC 22"W x 14"H x 1.25" thick (straight exit)


Universal Condenser Mounting Brackets

03113-VUB

Universal horizontal Super Flow mounting straps with bolts

03115-VUB

Universal mounting straps with bolts

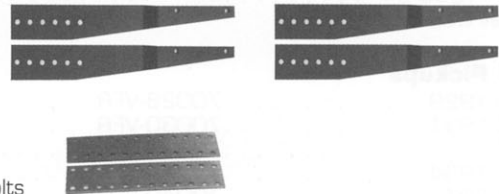

Safety Switches Protect Your System!

Low Pressure Switch

Automatically cuts current to compressor clutch when system runs low on refrigerant.

24903-VUS Low Pressure switch

High Pressure Switch


Automatically cuts current to compressor clutch when system has excessive head pressure.

24674-VUS High Pressure switch

Threaded Adapter

For installing female threaded trinary or binary switches into our standard or chrome driers.

18103-VUG Adapter (not compatible with Pro Line driers)

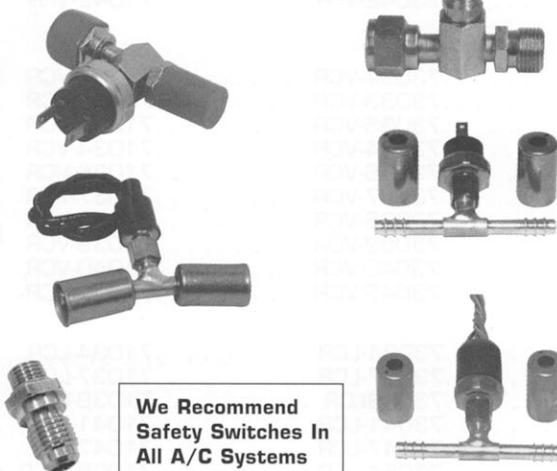

We Recommend Safety Switches In All A/C Systems

Switch Fitting

Pressure switch fitting. 3/8" female O-ring x 3/8" male O-ring w/ female switch installation fitting.

34098-VUG Switch fitting

Binary Switch Kit

Combines high and low pressure functions into one switch. 30 psi low pressure cutoff, 380 lb. high pressure cutoff.

24677-VUS Binary switch kit for barb crimp

24679-VUS Binary switch kit for beadlock crimp

11078-VUS Replacement binary switch only

Trinary Switch Kit

Low pressure and high pressure compressor clutch cut off functions PLUS electric fan engagement signal at 220 psi. 30 psi low pressure cut off. 380 psi high pressure cut off. Recommended for all electric fan installations.

24676-VUS Trinary switch kit for barb crimp

24678-VUS Trinary switch kit for beadlock crimp

11076-VUS Replacement trinary switch only

CUSTOMER SERVICE TEAM

Mark Hungerford is our technical services director. Mark is also totally into motorsports. Especially NASCAR racing. Mark is currently building a '65 Chevy pickup. All the usual tricks including, of course, a Vintage Air Sure Fit Kit!